



# AFI-4M

## STAGE MONITOR

### DESCRIPTION:

The AFI-4M is a two-way multi-angle monitor available in a passive or bi-amplified configuration. Additionally, the high frequency horn is available in both a 60° x 45° and a 90° x 45° pattern, both rotatable. These options make the AFI-4M ideal for both flown and floor monitoring applications.

### DRIVER COMPLEMENT:

**LOW FREQUENCY:** One Apogee 12" (305mm) permanent magnet cone-type driver is treated with a waterproofing compound, providing resistance to moisture, and enabling long-term stability of cone resonance and cone mass parameters; also treated with Ferrofluid® for greater power handling capability, lower distortion, and control of short-term impedance rise

**HIGH FREQUENCY:** One Apogee 1.75" (45mm) voice coil, 1" (25mm) exit horn-loaded compression driver treated with Ferrofluid

### INPUT CONNECTORS:

Two Neutrik™ NL4MP Speakon™ connectors – one on each end

### COMPATIBLE PROCESSORS:

AFI Main Frame Controller Chassis (using either AFI-4/-4B/-4W/-4WB Modules) or DLC24

### RECOMMENDED CROSSOVER (AFI-4MB ONLY):

Contact Apogee for full technical data on other DSP-based Processors

### HANDLES:

Two handles – one on each end – designed as an integral part of the enclosure (no moving parts)

### GRILLE:

Highly durable, quality finish on perforated steel (aluminum on SX version)

### FINISH:

Textured high-strength black or white epoxy paint; other colors optional

### ENCLOSURE TYPE:

Multi-angle floor monitor; optimally-vented bass

### TRIM:

Four steel skids; powder-coated for durability

### CABINET CONSTRUCTION:

Multi-ply hardwood

### OPTIONS/ACCESSORIES:

- AFI Controller Processor or DLC24 Digital Processor
- SX weather treatment for harsh environments

### ENGINEERING DATA:

#### FORMAT:

**AFI-4M/4MW** Passive/Two-way  
**AFI-4MB/4MWB** Bi-amped/Two-way

#### DISPERSION:

**AFI-4M/4MB** H: 60° x V: 45° (rotatable)  
**AFI-4MW/4MWB** H: 90° x V: 45° (rotatable)

#### FREQUENCY RESPONSE (1M ON AXIS):

58 Hz to 20 kHz ± 3 dB

#### MAX. SPL (@1M):

**AFI-4M** 121 dB cont./127 dB peak  
**AFI-4MB** 122 dB cont./128 dB peak

#### PTML (PEAK TRANSIENT MECHANICAL LIMIT):

**AFI-4M** 138 dB  
**AFI-4MB** 139 dB

#### SENSITIVITY (1W @ 1M):

**AFI-4M** 99 dB SPL/100 Hz to 4 kHz  
**AFI-4MB** LF: 99 dB SPL/100 Hz to 1.4 kHz  
 HF: 103 dB SPL/1.4 kHz to 5 kHz

#### NOMINAL IMPEDANCE:

8 ohms, each driver

#### MAX. POWER HANDLING:

**AFI-4M** 200 W cont./800 W peak  
**AFI-4MB** LF: 200 W cont./800 W peak  
 HF: 75 W cont./300 W peak

#### DIMENSIONS:


28.1" (714mm) W x 14.7" (373mm) H x  
 14.9" (379mm) D

#### WEIGHT:


53 lb. (24 kg)

**APOGEE**  
 SOUND INTERNATIONAL

**POLAR MEASUREMENTS AFI-4M** (6 dB/division, normalized)

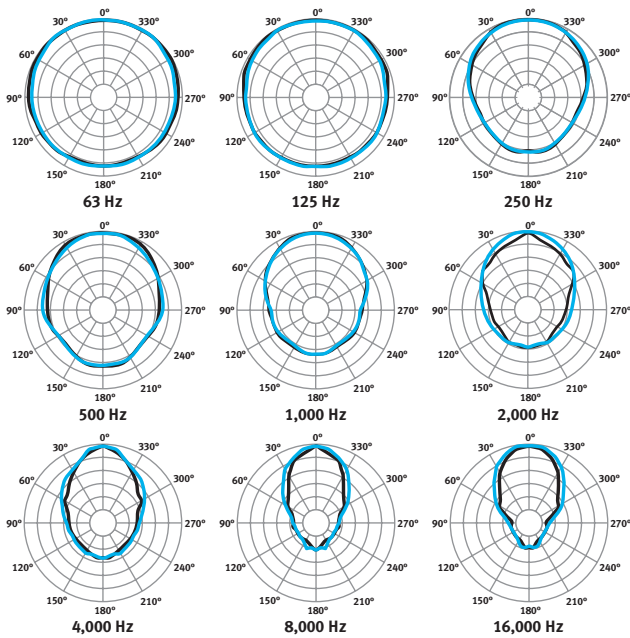

**FREQUENCY RESPONSE AFI-4M**

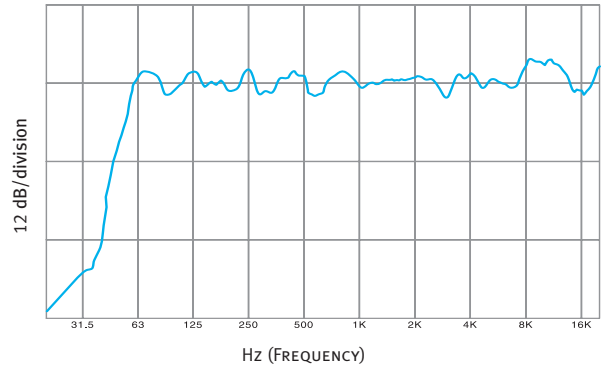

Measured in a free-field anechoic environment using a swept one-third octave input.

**PROCESSOR NOTES:**

The AFI Controller consists of an analog Main Frame which accepts four voicing modules. Modules are available for each of the different AFI loudspeaker types, with two module bays required for bi-amplified speakers.


The DLC24 Digital Loudspeaker Controller is a digital engine with an analog surface. It combines the most advanced technology available with intuitive interfaces to provide the key elements that ensure optimal loudspeaker system performance and management in a variety of live sound and fixed installation applications.

The controllers provide factory-set equalization curves to smooth the response, protective limiting, and active crossovers (for bi-amplified models and subwoofers). Barrier strip inputs and outputs are standard on the AFI Controller. XLR inputs and outputs are standard on the DLC24.


**HORIZONTAL** ———  
**VERTICAL** ———

All polar measurements obtained in a free-field environment at 10° increments.


**POLAR MEASUREMENTS AFI-4MW** (measurements for 63 Hz to 500 Hz are identical to the AFI-4M)

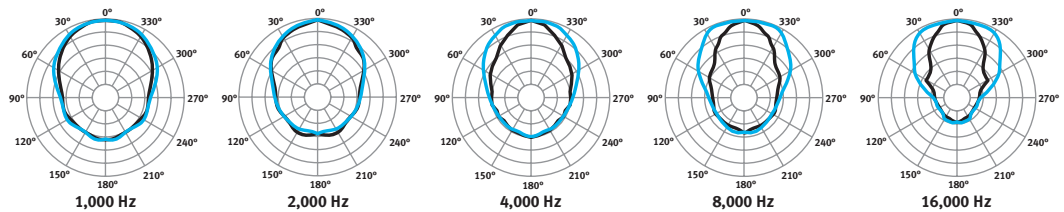


**DIMENSIONAL DRAWINGS AFI-4M** (dimensions in inches and millimeters)

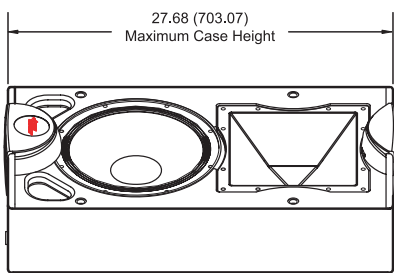


FRONT VIEW AT 35°  
(WITHOUT GRILLE)

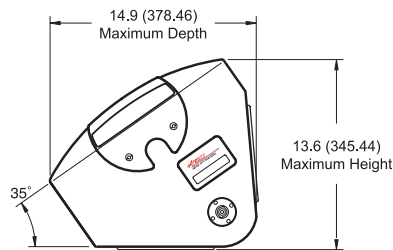

SIDE VIEW AT 35°  
(WITH GRILLE)

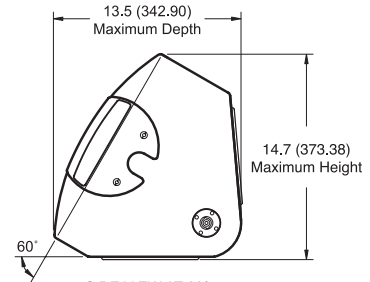

SIDE VIEW AT 60°  
(WITH GRILLE)

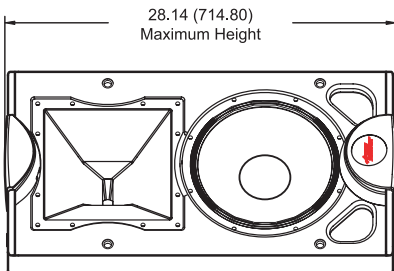

FRONT VIEW AT 60°  
(WITHOUT GRILLE)



50 SPRING STREET, RAMSEY, NJ 07446, USA  
 TEL: 800-443-3979 • FAX: 800-999-9016 • www.apogee-sound.com