

HAI Web-Link II

Automation...*simplified.*



from the internationally recognized leader of home automation and security products...




HAI is proud to introduce Web-Link II - a great new way to access your HAI system via the Internet. Web-Link II allows you to monitor and adjust settings for lighting, heating and air, security, and appliances with the added benefit of wireless access, video surveillance and recording, and email notification of programmed events.

HAI's Web-Link II will work inside a home on a single PC, and with a group of PCs on a local network. It also takes advantage of the full-time Internet connection provided by popular cable modems and DSL. These connections, combined with Web-Link II's intuitive, easy to use pages make it quick and easy to check on the house with video surveillance, record video based on a system event, view previously recorded videos, verify the kids have arrived home from school via email notification, and adjust the temperature - right from your office PC, PDA, or web-enabled phone.

HAI Web-Link II runs in the background on a Windows 98, 2000, NT, or XP Pro computer connected to any HAI Omni®-class controller. HAI Web-Link II software generates Web pages from the controller's data that can be viewed locally and on any networked computer via Internet or Local Area Network. After installing Web-Link II, no set up is required: Web-Link II's smart software obtains its configuration from the HAI controller and presents a series of pages following the standard HAI menu format.

Web-Link II has advanced the initial Web-Link technology by adding features that allow a homeowner to view family and property with video surveillance, record video on demand or based on event, and enjoy wireless access over a PDA or web-enabled phone. In addition, a homeowner can receive emails based on programmed events or send and receive instant messages.

Go online and give it a try! Simply go to www.homeauto.com and click on HAI Web-Link II for a demonstration of HAI's award-winning Web-Link II.

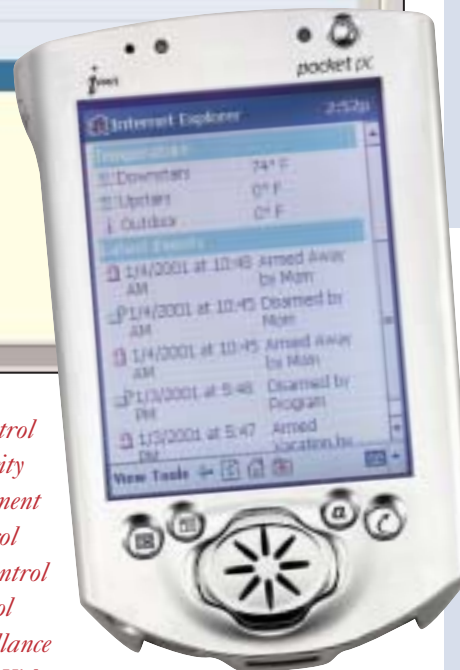

Control these features from anywhere via the Internet...

- Lighting Control*
- Enhanced Security*
- Energy Management*
- Temperature Control*
- Home Theater Control*
- Appliance Control*
- Video Surveillance*
- Record/Play Videos*
- Email Notification*
- Instant Messaging*



OMNI SOLUTIONS

HAI - APPLYING TECHNOLOGY FOR COMFORT, CONVENIENCE, AND SAFETY SINCE 1985





an omni solution for today's lifestyles

www.homeauto.com

HAI Web-Link II[®]

You're just a click away with HAI Web-Link II

Whether you're at the office or on vacation, your home is only a click away. Using your laptop, PDA, web-enabled phone, or any computer with Internet access, you can monitor and control your home. You can even view and record video from cameras in your home with video streaming technology. It's as easy as viewing your favorite web site.

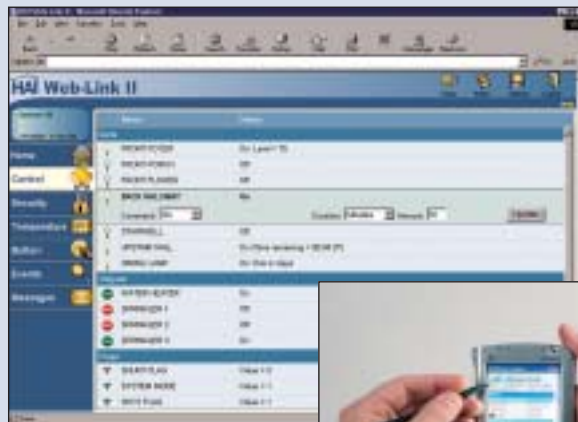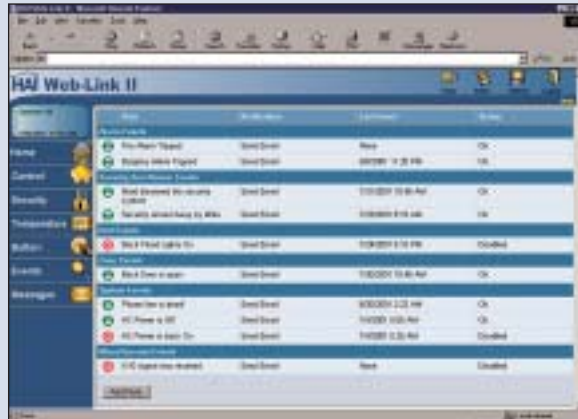

Web-Link II comes pre-configured with a series of standard pages which makes it simple to use:

- The Home page displays an overall summary of the system. This page displays security status, temperatures, messages, latest events, and the latest recorded videos.
- The Control page displays status of lights, appliances, sprinklers, relays, and flags and allows for their control.
- The Security page displays security mode (for each area), status of each zone, and trouble conditions.
- The Temperature page displays the current status of all Thermostats and Temperature Sensors in the system and allows for their control.
- The Button page is for running macros and scenes.
- The Events page shows time-stamped activities and events.
- The Messages page allows control of system messages.
- The Rules page displays the list of rules and current status of each rule. A rule is a conditional statement that tells Web-Link II what to do (i.e. send email) when the specified event in the rule occurs.
- The Options page is used to change configurable items (i.e. changing skins and channel list) and view useful information about Web-Link II.
- The Cameras button starts the HAI Video-Link Player. You will see video and hear audio from the connected devices.
- The Videos page displays a list of recorded videos along with the date and time of the recording. These videos can then be played or deleted.

Each page offers comprehensive system status and full control capability, providing home control over the Internet in a simple "point and click" environment.

The Events page allows you to see when people have entered, left, or moved about the property. Coupled with video, you can see when the kids get home from school, when the housekeeper comes (and how long they stay), and be sure that the kid next door is feeding the pets while you're on vacation! It can provide assurance that elderly relatives are "up and about", maximizing their independence and happiness.

A track record of award-winning products.... Since 1985, HAI has been raising the standard in home automation technology. Web-Link II is proof of HAI's ongoing commitment to providing advanced products at affordable prices.

System Requirements for HAI Web-Link II

- HAI OmniLT[®], Omni[®], Omni II[®], OmniPro[®] or OmniPro II[®] controller with serial interface.
- Computer that meets the required standards stated below:

Minimum Computer Requirements without Streaming Video Capability

- 200 MHz Pentium processor or equivalent
- Microsoft Windows 98 SE, NT 4, 2000, or XP Professional
- 32 MB of RAM
- 50 MB hard-disk space
- CD-ROM drive

*Windows ME and Windows XP Home Edition are not supported operating systems.

Minimum Computer Configuration with Streaming Video Capability

- 450 MHz Pentium II or III, processor or equivalent
- Microsoft Windows 98 SE, NT 4, 2000, or XP Professional
- 128 MB of RAM
- USB port or Hauppauge WinTV-GO PCI boards

Recommended Computer Configuration with Streaming Video Capability

- 700 MHz dual processor Pentium III, IV, or equivalent
- Microsoft Windows XP Professional
- 256 MB of RAM
- USB port or Hauppauge WinTV-GO PCI boards

Supported Cameras

- USB (Web Cam) camera connected to a USB port the Web-Link II Server Computer (this configuration supports only 1 camera)
- One or multiple CCD cameras modulated onto a Hauppauge WinTV-GO TV Tuner Board on the Web-Link II Server Computer: CCD camera(s) are connected to a video modulator. The output from the modulator is then connected to a Hauppauge WinTV-GO PCI board in the Web-Link II Server Computer (up to 40 cameras can be connected in this configuration).

Local Area Network

- Web-Link II works in a TCP/IP network for use on one or more local computers.

Internet

- Web-Link II works best with a full-time Internet connection (i.e. DSL or Cable service) service with a Static IP Address or Dynamic DNS Service.



visit us at www.homeauto.com
 email us at sales@homeauto.com
 call us at 800-229-7256

HAI, HAI Omni and HAI Web-Link are registered trademarks of HAI. Other Logos, Tradenames and Trademarks are the property of their respective owners.

